



# MVB10E

## **2IN1 Video Processor**

### Specification V4.0



# CONTENT

1 Update Records .....	3
2 Product Introduction .....	3
3 Product Characteristics .....	3
3.1 Improve the display effect .....	3
3.2 Diversified Display Function .....	4
4 Application Scenarios .....	5
5 Product Appearance .....	5
5.1 Data Interface Illustration .....	6
5.2 Dimensions .....	10
6 Product Specification .....	11
6.1 Basic Parameters .....	11
6.2 Specification .....	11
6.3 Video source Characteristics .....	12
7 Precautions .....	12

## 1 Update Records

Document Version	Hardware Version	Release Time	Update Record
V4.0	MVB10E (V2.1.2)	July 27(th), 2025	First release

## 2 Product Introduction

MVB10E is an easy-to-operate and feature-rich device that specially developed for LED displays. The maximum load of a single device 6.50 million pixels, supports a maximum width of 8192 pixels, and a maximum height of 3840 pixels; It supports 4K high-definition multi-type interface input, integrates professional display control technology and powerful video processing capabilities, and it simplifies the scene environment to build a video processor.Using high-performance image processing chip; with advanced interlaced image adaptive processing technology and ultra-clear noise reduction engine, eliminating video image motion smearing and jagged phenomenon, the video image enhancement technology makes the image clearer and more detailed, rich in details, and full of colors , Image quality is stable..

## 3 Product Characteristics

### 3.1 Improve the display effect


- Multiple input interfaces  
1×HDMI2.0、1×HDMI1.4、1×HDMI1.4 (built-in) 1×DVI, 1×DP
- EDID, Support custom EDID management
- Output interface
  - 10 gigabit network ports
- Maximum load 6.5 million pixels, custom output resolution, regular version maximum width 8192, maximum height 3840.
- Audio interface: Support audio input and output

### 3.2 Diversified Display Function


- Supports simultaneous display of 4 screens: Output resolution width exceeding 4096 requires single-screen display
- Supports 100Mbps Ethernet, USB, and RS232 serial port debugging control
- Supports creation of 8 user scenes as templates for direct recall, enhancing usability
- Intuitive front-panel LCD display with clear key indicator lights simplifies system control operations
- Supports one-touch entry into user scenes for template saving and recall interface
- Supports picture scaling modes: Full-screen scaling, Pixel-to-pixel scaling, Custom scaling
- Supports seamless multi-screen switching and single-layer seamless switching
- Supports quick screen configuration with simple operations
- Supports window position/size adjustment and window cropping functions
- Supports external independent audio input and output
- Supports custom output resolution, supports custom input EDID
- Supports audio-video synchronized switching
- Supports partial or full-screen switching
- Supports scheduled tasks
- Supports one-touch screen blackout
- Supports built-in test pattern card
- Supports USB playback
- Supports USB firmware upgrade

## 4 Application Scenarios

It is suitable for many application scenarios such as small and medium-sized LED displays in shopping malls, hotels, exhibitions, TV studios, etc.

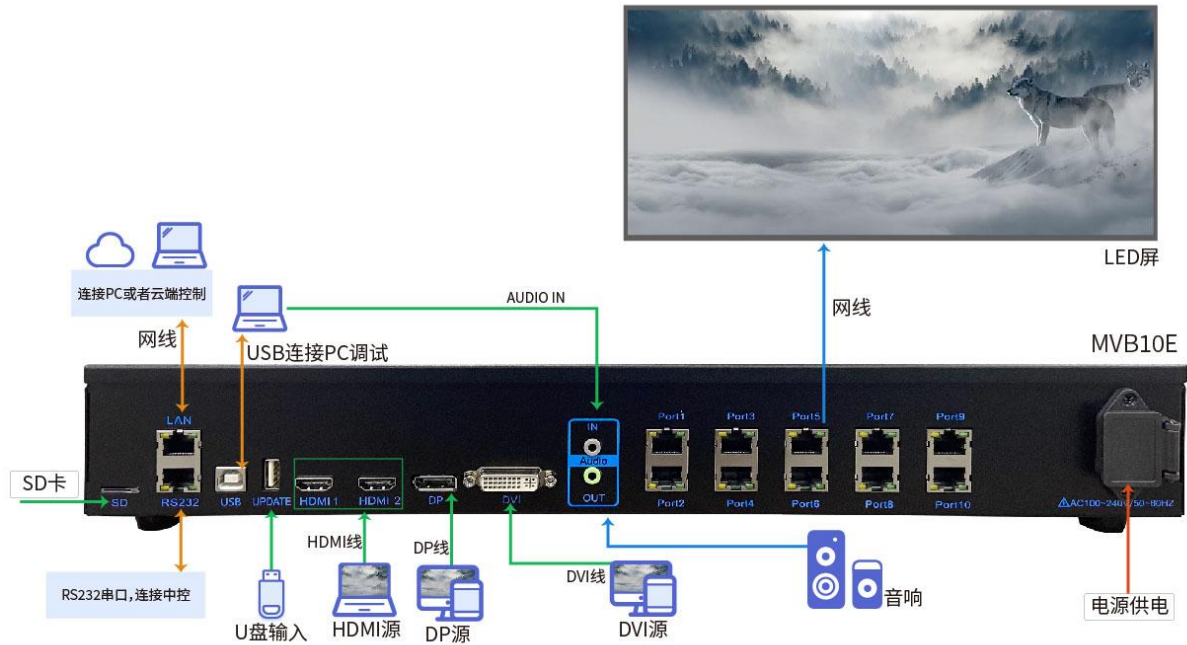

## 5 Product Appearance

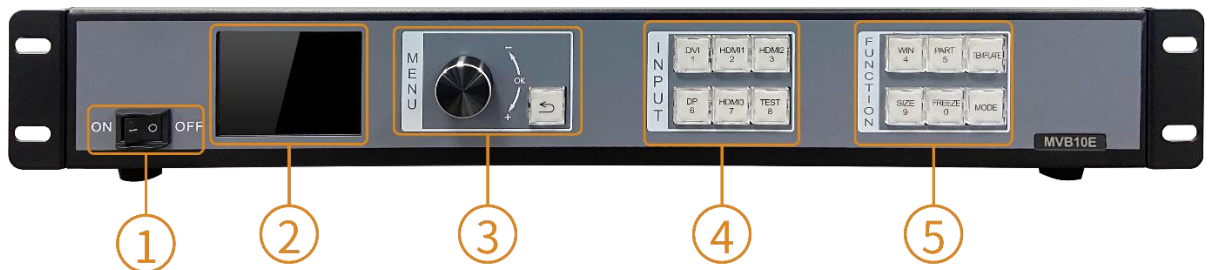


\*Product images are for reference only. The actual product shall prevail upon purchase.

## 5.1 Data Interface Illustration

#	Keys	Illustrations						
1	ON/OFF	Power ON/OFF						
2	LCD Display	To display the current status of the device and to have the menu settings.						
3	Knob	<p>1 、 In the main interface,press the knob to enter the menu operation interface;</p> <p>2、 In the menu operation interface,rotate the knob to choose the menu, press the knob to select the current menu or enter its sub-menu.</p> <p>3 、 Once the menu that is with parameters selected, you could rotate the knob to adjust the parameters.</p> <p>4. Long press to unlock the menu.</p>						
3	Esc	Return(ESC)/Cancel the current menu or operation.						
4	Input Signal	<table border="1"> <tbody> <tr> <td>DVI</td> <td> DVI Source/Digital Key 1:  Off: This signal source is not selected  Flashing: This signal source is selected but no signal is present  On: This signal source is selected and a signal is present </td> </tr> <tr> <td>HDMI1</td> <td> HDMI1 Source/Digital Key 2:  Off: This source is not selected  Flashing: This source is selected but no signal is present  Solid: This source is selected and a signal is present </td> </tr> <tr> <td>HDMI2</td> <td> HDMI2 Source Digital Indicator 3:  Off: This source is not selected  Flashing: This source is selected but no signal is present  On: This source is selected and a signal is present </td> </tr> </tbody> </table>	DVI	DVI Source/Digital Key 1: Off: This signal source is not selected Flashing: This signal source is selected but no signal is present On: This signal source is selected and a signal is present	HDMI1	HDMI1 Source/Digital Key 2: Off: This source is not selected Flashing: This source is selected but no signal is present Solid: This source is selected and a signal is present	HDMI2	HDMI2 Source Digital Indicator 3: Off: This source is not selected Flashing: This source is selected but no signal is present On: This source is selected and a signal is present
DVI	DVI Source/Digital Key 1: Off: This signal source is not selected Flashing: This signal source is selected but no signal is present On: This signal source is selected and a signal is present							
HDMI1	HDMI1 Source/Digital Key 2: Off: This source is not selected Flashing: This source is selected but no signal is present Solid: This source is selected and a signal is present							
HDMI2	HDMI2 Source Digital Indicator 3: Off: This source is not selected Flashing: This source is selected but no signal is present On: This source is selected and a signal is present							

		DP	DP Source/Num 6: Off: This source is not selected Flashing: This source is selected but no signal is present On: This source is selected and a signal is present
		HDMI3	HDMI3 Source/Digital Key 7: Off: This source is not selected Flashing: This source is selected but no signal is present On: This source is selected and a signal is present
		TEST	TEST/Number 8 Key: Test Pattern Card Shortcut Key Key indicator remains off; press to enter the test pattern menu.
5	Function Button	WIN	WIN/Num 4: Layer Selection
		PART	Open multiple windows; use this key to switch between them
		TEMPLATE	PART/Num 5: Partial/Fullscreen Shortcut Button
		SIZE	Always on: Display partial screen
		FREEZE	Multi-screen Template Shortcut Button
		MODE	SIZE/Num 9: Zoom Settings

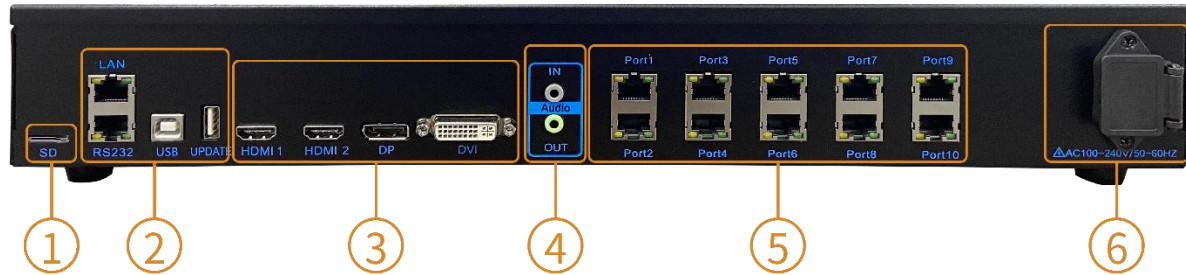
**Rear Panel**


\*Product images are for reference only. The actual product shall prevail upon purchase.

Input Interface			
#	Interface Type	QTY	Illustration
3	HDMI1	1	1×HDMI 1.4, Supports up to 3840×2160@30Hz and 3840×1080@60Hz resolution video source input Backward compatible Supports custom resolutions Supports 8-bit video input
	HDMI2	1	1×HDMI 2.0, Supports up to 3840×2160@60Hz resolution video source input Backward compatible Supports custom resolutions Supports 8-bit video input
	DP	1	1×DP1.2 Supports up to 3840×2160@60Hz resolution video source input Backward compatible
	DVI	1	VESA Standards.Maximum supports 1920×1200@60Hz resolution video source input , downwards compatible.
	HDMI3	1	1×HDMI1.4 Built-in Supports up to 3840×2160@30Hz and 3840×1080@60Hz resolution video source input Backward compatible Supports custom resolutions Supports 8-bit video input

Output Interface			
#	Interface Type	QTY	Illustration
5	Network Port	10	<p>10 Gigabit Ethernet port output connectors to the receiver card.</p> <p>Network port indicator light description:</p> <ul style="list-style-type: none"> <li>- Dual lights are always on: the power is turned on, but the receiving card is not detected.</li> <li>- Dual lights are not on: the power supply is not connected.</li> <li>- The yellow light is always on, the green light is flashing: the signal is normal and communication is in progress.</li> </ul>
AUDIO Interface			
#	Interface	QTY	Illustration
4	Audio in	1	3.5mmAudio Interface Input
	Audio Out	1	3.5mmAudio Interface Output
Control Interface			
#	Interface Type	QTY	Illustration
2	LAN	1	100M Ethernet Port, Reserved Port
	RS232	1	Serial Port
	USB-B	1	Configure Port to connect to the PC
	Update	1	1×USB2.0, USB Drive Upgrade
Extended Function Interface			
#	Interface Type	QTY	Illustration
1	SD	1	SD Card: Stores large-screen configuration parameters for data inspection.
Output Interface			
#	Interface Type	QTY	Illustration
6	Power Supply	1	AC-100-240V-50/60HZ AC power interface

**5.2 Dimensions**

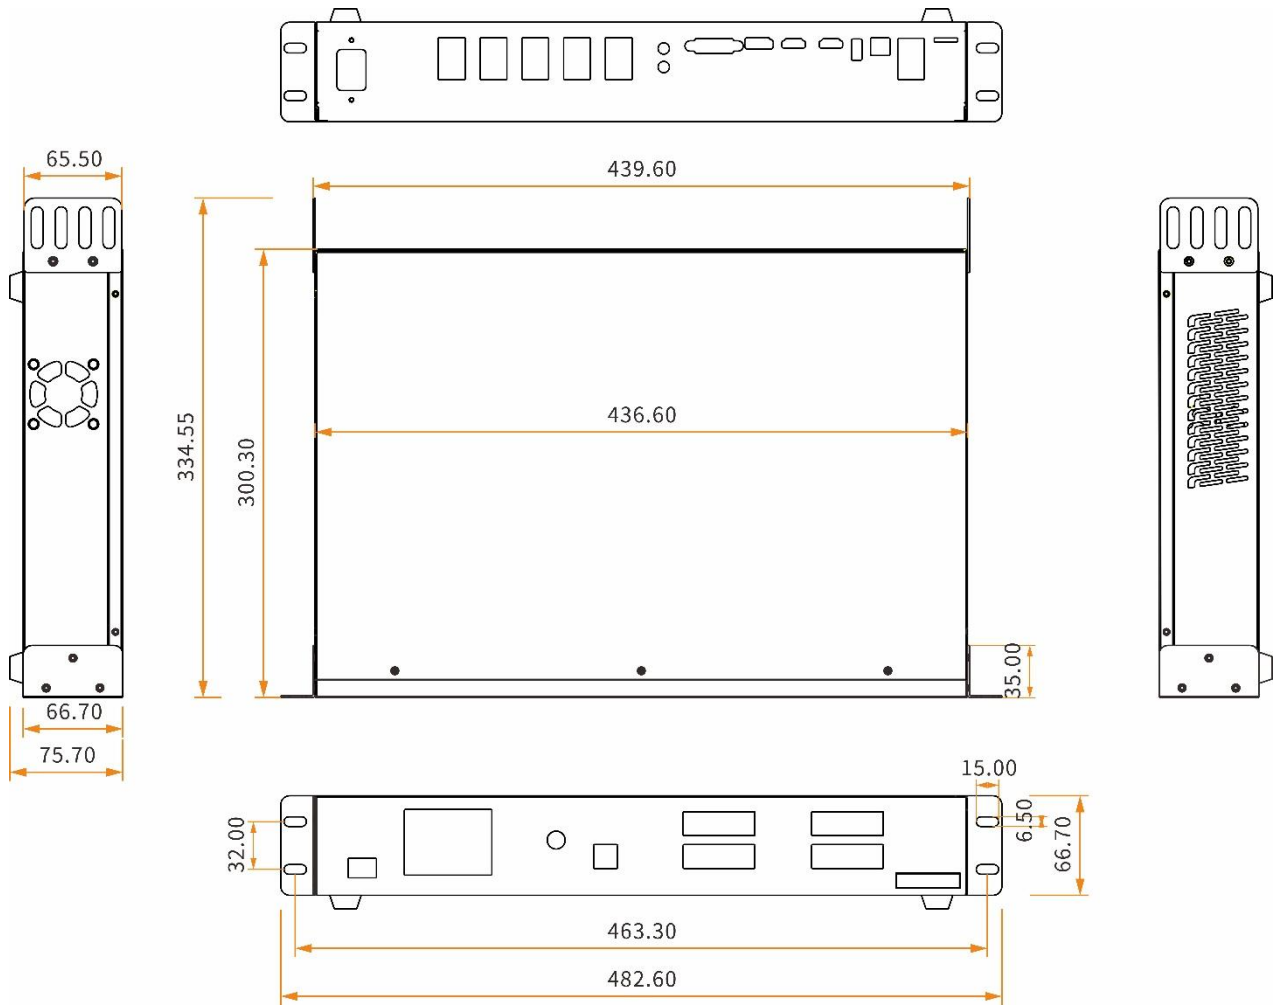

Tolerance:  $\pm 0.3$  Unit: mm

## 6 Product Specification

### 6.1 Basic Parameters

Loading capacity	Single network port	The maximum load is 655360 pixels, and the network port load is $1280 \times 512$ .
	Whole Unit	6.50 million Pixels
Maximum width/height of whole machine	Pixels are controlled within 6.50 million points Widest: 8192 Highest: 3840	

When the load height exceeds 8,192 pixels, the overall load capacity gradually decreases with increasing height, but remains no less than 11.98 million pixels.

### 6.2 Specification

Electrical parameters	Input voltage	AC-100-240V-50/60HZ
	Rated current	25W
Working environment	Working temperature	0°C~50°C
	Working humidity	5%RH~85%RH has no condensation.
Storage environment	Temperature	-10°C~60°C
Board size	482.6mm×334.5mm×75.7	
Net weight	3.76kg	
Outer packing size	515×130×380mm	
Gross weight of product	5.12 Kg Description: Including wire, accessories	
Packing mode	3 PCS /box	
Accessory	1 × power cord, 1 × USB2.0 cable, 1 × HDMI cable, 1*DVI cable, 1*DP Cable, 1 × certificate	


\*Current and power consumption may vary depending on factors such as product usage, environment, and settings.

### 6.3 Video source Characteristics

Input Interface	Color Depth		Maximum input resolution
HDMI1.4	8bit	RGB4:4:4	3840x2160@30Hz
		YCbCr4:4:4	
		YCbCr4:2:2	
HDMI2.0/DP1.2	8bit	RGB4:4:4	3840x2160@60Hz
		YCbCr4:4:4	
		YCbCr4:2:2	
DVI	8bit	RGB4:4:4	1920*1200@60Hz
		YCbCr4:4:4	
		YCbCr4:2:2	

## 7 Precautions

- High voltage hazard: This product operates at AC 100V~240V.
- Do not allow liquids or metal fragments and other conductive materials to enter the device, to prevent safety accidents.
- Please use the device in a dry and clean environment.

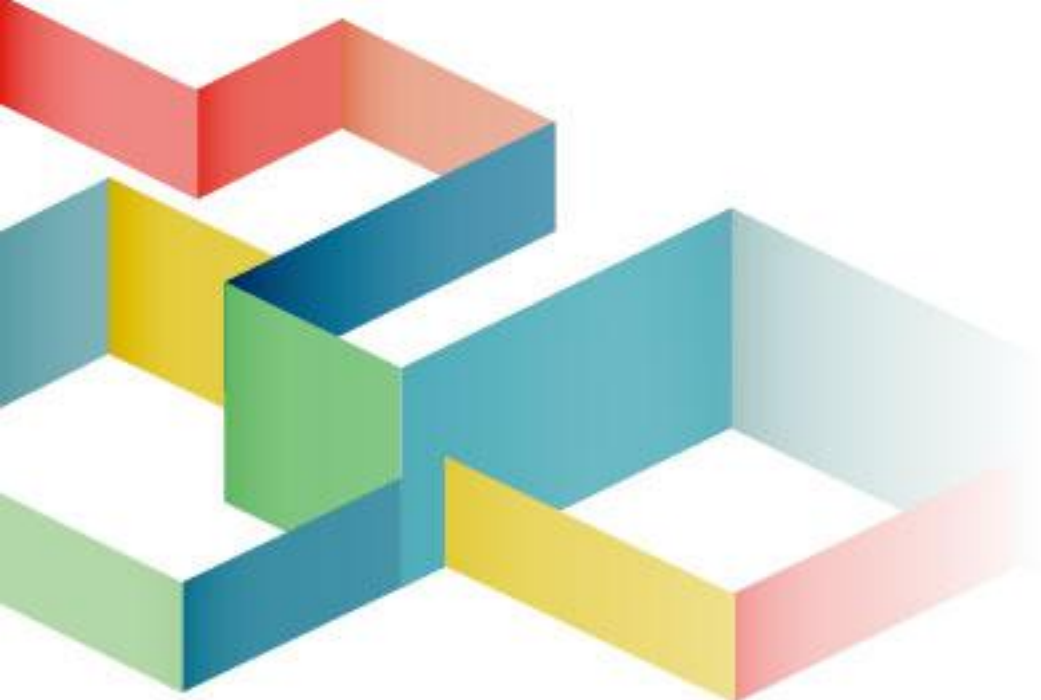

National after-sales services hotline: 400-881-3531

Official website: [www.mooncell.com.cn](http://www.mooncell.com.cn)

Address: Mooncell Building, Third Industrial Zone, Baoshi  
South Road, Shiyan Street, Baoan District, Shenzhen

